

Riverside, M0 64150 Telephone: 816.231.5580 Fax: 816.231.5641 www.occutec.com

May 31, 2018

Diane Czarnecki
Industrial Hygienist
Facilities Management Division
GSA Public Buildings Service - Heartland Region
2300 Main Street, Kansas City, MO 64108

RE: Goodfellow Federal Center – Bldg. # 104F Drinking Water Sampling Project # 918004.002

Dear Ms. Czarnecki:

Thank you for the opportunity to provide the General Services Administration (GSA) with the above referenced environmental sampling activities. The following is our report.

### **INTRODUCTION**

As requested, OCCU-TEC conducted drinking water sampling and testing for the presence of lead and copper at Building #104F of the Goodfellow Federal Center located at 4300 Goodfellow Federal Center in St. Louis, Missouri. Sampling was completed in response to the ongoing environmental condition assessment at the Goodfellow Federal Center complex which is documented at the Goodfellow Federal Center Reading Room located at https://www.gsa.gov/portal/content/212361.

Drinking water sampling was conducted to determine the current levels of lead and copper in representative sources throughout the complex. Drinking water sampling at Bldg. #104F was conducted on April 30, 2018 by Mr. Justin Arnold of OCCU-TEC.

### METHODOLOGY

The sampling methodology used during this investigation was developed in general accordance with the United States Environmental Protection Agency's (EPA) "Quick Guide to Drinking Water Sample Collection – Second Edition" developed by the EPA Region 8 in September 2016.

Samples were collected as first draw samples in accordance with the Lead and Copper Rule (40 CFR Part 141 Subpart I). First draw samples represent 'worst case' conditions with water that has been stationary within the plumbing systems for a minimum of six hours. The samples were collected in individually labeled 1000 milliliter (mL) plastic bottles capped with Teflon septa lined screw caps. The bottles were filled to the shoulder with water from the sample source. The samples were then placed in a cooler for safe transport. Each sample was acidified at the laboratory as needed.

Drinking water sampling for the presence of lead and copper was conducted at three (3) distinct locations within Building #104F. A total of four (4) samples were obtained. After each drinking water sample was collected, OCCU-TEC filled a separate sample cup with approximately 2 inches of water. OCCU-TEC placed an Oakton model PHTester30 pH meter into the sample cup. After readings stabilized, OCCU-TEC recorded the readings for pH (the acidity or basicity of an aqueous solution) and the temperature (in degrees Celsius) on site specific sample logs.

Drinking water samples were submitted to Eurofins-Eaton Analytical in South Bend, IN for analyses of lead and copper. Eurofins-Eaton Analytical is certified by the State of Missouri Department of Natural Resources (MDNR) as an approved drinking water laboratory. Eurofins-Eaton Analytical's Missouri Certification number is 880.

The drinking water samples were collected using media supplied by Eurofins-Eaton Analytical. Lead and Copper samples were collected and analyzed in accordance with EPA Method 200.8.

### RESULTS AND DISCUSSION

The results for the subject testing are summarized in the tables below.

### Water Sample Summary

Analysis	Lowest Concentration	Highest Concentration	Action Level*		
Lead	<0.001 mg/L	0.0091 mg/L	0.015 mg/L		
Copper	0.140 mg/L	0.340 mg/L	1.3 mg/L		

Samples with a "<" sign indicate that the results were below the reportable limit.

Specific water sample locations are indicated in Appendix A. A summary table of all sampling results by location is included in Appendix B. The complete laboratory report for the drinking water sampling from Eurofins-Eaton Analytical is attached in Appendix C.

<sup>\*</sup>As per EPA Lead and Copper Rule (40 CFR Part 141 Subpart I)

#### LEAD

All samples were below the Action Level (AL) for lead.

### **COPPER**

All samples were below the AL for copper.

PH

Normal pH levels for drinking water are between 6.0 to 8.5. Water with a pH < 6.5 is considered acidic, soft, and corrosive. Acidic water may contain metal ions, may cause premature damage to metal piping, and increases the likelihood of leaching. Water with a pH > 8.5 is considered alkaline or basic and can indicate that the water is hard. Hard water does not pose a health risk but can cause aesthetic problems. These problems include an alkali taste, the formation of scale deposits, and difficulty in getting soaps and detergents to lather.

Recorded pH levels in Building #104F ranged from 9.02 to 9.34 indicating the drinking water is slightly alkaline.

### LIMITATIONS

The scope of this assessment was limited in nature. OCCU-TEC collected samples from a select number of drinking water sources in an effort to minimize cost while providing a general overview of the drinking water quality at the site. Sample locations do not encompass every drinking water source at the Site. Additionally, samples were only analyzed for a select number of potential contaminants likely to affect the drinking water quality at the site. OCCU-TEC is not responsible for potential contaminants not identified in this report.

This report was prepared for the sole use of GSA. Reliance by any party other than GSA is expressly forbidden without OCCU-TEC's written permission. Any parties relying on the report, with OCCU-TEC's written permission, are bound by the terms and conditions outlined in the original proposal as if said proposal was prepared for them.

OCCU-TEC appreciates the opportunity to work with the General Services Administration on this project. Please contact us if you have any questions regarding this report or if we may be of any additional service.

Sincerely,



Jeff T. Smith Senior Project Manager (b) (6)


Kevin Heriford

Project Manager (QA/QC)

### **ATTACHMENTS**

Appendix A, Water Sample Location Diagrams Appendix B, Results Summary by Location Appendix C, Water Sample Laboratory Report

# Appendix A Water Sample Location Diagrams

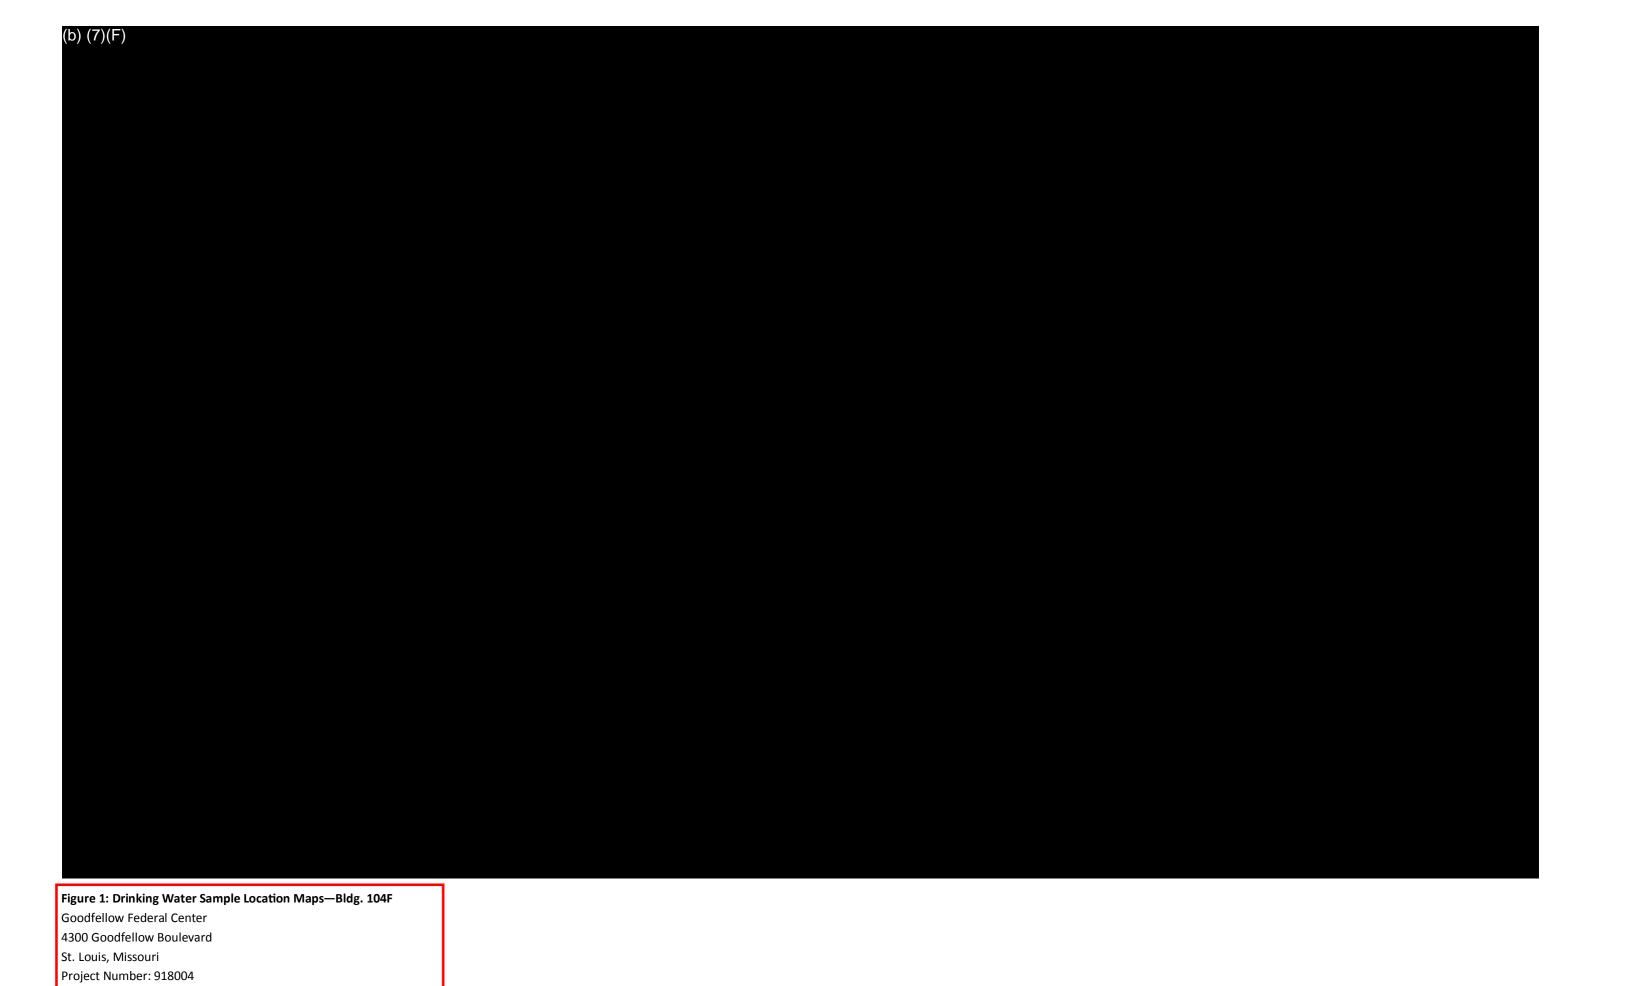

# Appendix B Results Summary by Location

	Goodfellow Federal Center - Building 104F												
Sample Number	Location	Water Source	Temperature	рН	Analyte	Result	Units	Units Above/Below					
	First floor east hall - Halsey Taylor	Drinking Fountain	14	9.02	Copper	0.14	mg/L	Below AL	1.3				
104F-18-01	First 11001 east Hall - Halsey Taylor	Dilliking Fountain	14	9.02	Lead	0.0092	mg/L	Below AL	0.015				
	First floor south end	Sink	15.3	9.2	Copper	0.34	mg/L	Below AL	1.3				
104F-18-02	First floor south end	SITIK	15.5	9.2	Lead	0.0031	mg/L	Below AL	0.015				
	First floor south end - Duplicate	Sink			Copper	0.21	mg/L	Below AL	1.3				
104F-18-02DUP	First floor south effu - Duplicate	SILIK			Lead	0.0031	mg/L	Below AL	0.015				
	Second floor north hall - new Elkay	Drinking Fountain	16.1	9.34	Copper	0.023	mg/L	Below AL	1.3				
104F-18-03	Second floor flortiffiall - flew Elkay	- new Elkay Drinking Fountain		5.34	Lead	< 0.001	mg/L	Below AL	0.015				

# Appendix C Water Sample Laboratory Report



## LABORATORY REPORT

If you have any questions concerning this report, please do not hesitate to call us at  $(800)\ 332-4345$  or  $(574)\ 233-4777$ .

This report may not be reproduced, except in full, without written approval from EEA.



### **STATE CERTIFICATION LIST**

State	Certification	State	Certification
Alabama	40700	Missouri	880
Alaska	IN00035	Montana	CERT0026
Arizona	AZ0432	Nebraska	NE-OS-05-04
Arkansas	IN00035	Nevada	IN00035
California	2920	New Hampshire*	2124
Colorado	IN035	New Jersey*	IN598
Colorado Radiochemistry	IN035	New Mexico	IN00035
Connecticut	PH-0132	New York*	11398
Delaware	IN035	North Carolina	18700
Florida*	E87775	North Dakota	R-035
Georgia	929	Ohio	87775
Hawaii	IN035	Oklahoma	D9508
Idaho	IN00035	Oregon (Primary AB)*	4074-001
Illinois*	200001	Pennsylvania*	68-00466
Illinois Microbiology	17767	Puerto Rico	IN00035
Illinois Radiochemistry	IN00035	Rhode Island	LAO00343
Indiana Chemistry	C-71-01	South Carolina	95005
Indiana Microbiology	M-76-07	South Dakota	IN00035
Iowa	098	Tennessee	TN02973
Kansas*	E-10233	Texas*	T104704187-15-8
Kentucky	90056	Texas/TCEQ	TX207
Louisiana*	LA180008	Utah*	IN00035
Maine	IN00035	Vermont	VT-8775
Maryland	209	Virginia*	460275
Massachusetts	M-IN035	Washington	C837
Michigan	9926	West Virginia	9927 C
Minnesota*	018-999-338	Wisconsin	999766900
Mississippi	IN035	Wyoming	IN035
EPA	IN00035		

\*NELAP/TNI Recognized Accreditation Bodies

Revision date: 01/02/2018



110 South Hill Street South Bend, IN 46617 Tel: (574) 233-4777 Fax: (574) 233-8207 1 800 332 4345

### Laboratory Report

Client: OCCU-TEC Inc. Report: 415654

Attn: Kevin Heriford Priority: Standard Written

100 NW Business Park Lane Status: Final

Riverside, MO 64150 PWS ID: Not Supplied

	Sample Information												
EEA ID#	Client ID	Method	Collected Date / Time	Collected By:	Received Date / Time								
3928106	104F-18-01	200.8	04/26/18 04:41	Client	05/02/18 10:00								
3928107	104F-18-02	200.8	04/26/18 04:44	Client	05/02/18 10:00								
3928108	104F-18-02Dup	200.8	04/26/18 04:44	Client	05/02/18 10:00								
3928109	104F-18-03	200.8	04/26/18 04:50	Client	05/02/18 10:00								

### **Report Summary**

Detailed quantitative results are presented on the following pages. The results presented relate only to the samples provided for analysis.

We appreciate the opportunity to provide you with this analysis. If you have any questions concerning this report, please do not hesitate to call Kelly Blackburn at (574) 233-4777.

Note: This report may not be reproduced, except in full, without written approval from EEA.

(b) (6)

Client Name:

ASM

05/14/2018

Date

Authorized Signature

OCCU-TEC Inc.

Report #: 415654

Title

Client Name: OCCU-TEC Inc. Report #: 415654

Sampling Point: 104F-18-01 PWS ID: Not Supplied

Lead and Copper											
Analyte ID #	Analyte	Method	Reg MRL† Result Units				Preparation Date	EEA ID#			
7440-50-8	Copper	200.8	1300 !	1.0	140	ug/L		05/10/18 18:25	3928106		
7439-92-1	Lead	200.8	15 !	1.0	9.2	ug/L		05/10/18 18:25	3928106		

Sampling Point: 104F-18-02 PWS ID: Not Supplied

Lead and Copper												
Analyte ID #	Analyte	Analyte Method				Units	Preparation Date	Analyzed	EEA ID#			
7440-50-8	Copper	200.8	1300 !	1.0	340	ug/L		05/10/18 18:28	3928107			
7439-92-1	Lead	200.8	15 !	1.0	3.1	ug/L		05/10/18 18:28	3928107			

Sampling Point: 104F-18-02Dup PWS ID: Not Supplied

Lead and Copper												
Analyte ID #	Analyte	Analyte Method				Units	Preparation Date	Analyzed	EEA ID#			
7440-50-8	Copper	200.8	1300 !	1.0	210	ug/L		05/10/18 18:30	3928108			
7439-92-1	Lead	200.8	15 !	1.0	3.1	ug/L		05/10/18 18:30	3928108			

Sampling Point: 104F-18-03 PWS ID: Not Supplied

Lead and Copper												
Analyte ID #	Analyte	Method	Reg Limit	- 11 ' 11 11			Preparation Date	Analyzed	EEA ID#			
7440-50-8	Copper	200.8	1300 !	1.0	23	ug/L		05/10/18 18:33	3928109			
7439-92-1	Lead	200.8	15 !	1.0	< 1.0	ug/L		05/10/18 18:33	3928109			

† EEA has demonstrated it can achieve these report limits in reagent water, but can not document them in all sample matrices.

Reg Limit Type:	MCL	SMCL	AL
Symbol:	*	۸	!

Client Name: OCCU-TEC Inc. Report #: 415654

#### **Lab Definitions**

Continuing Calibration Check Standard (CCC) / Continuing Calibration Verification (CCV) / Initial Calibration Verification Standard (ICV) / Initial Performance Check (IPC) - is a standard containing one or more of the target analytes that is prepared from the same standards used to calibrate the instrument. This standard is used to verify the calibration curve at the beginning of each analytical sequence, and may also be analyzed throughout and at the end of the sequence. The concentration of continuing standards may be varied, when prescribed by the reference method, so that the range of the calibration curve is verified on a regular basis. CCL, CCM, and CCH are the CCC standards at low, mid, and high concentration levels, respectively.

**Internal Standards (IS)** - are pure compounds with properties similar to the analytes of interest, which are added to field samples or extracts, calibration standards, and quality control standards at a known concentration. They are used to measure the relative responses of the analytes of interest and surrogates in the sample, calibration standard or quality control standard.

**Laboratory Duplicate (LD)** - is a field sample aliquot taken from the same sample container in the laboratory and analyzed separately using identical procedures. Analysis of laboratory duplicates provides a measure of the precision of the laboratory procedures.

Laboratory Fortified Blank (LFB) / Laboratory Control Sample (LCS) - is an aliquot of reagent water to which known concentrations of the analytes of interest are added. The LFB is analyzed exactly the same as the field samples. LFBs are used to determine whether the method is in control. FBL, FBM, and FBH are the LFB samples at low, mid, and high concentration levels, respectively.

**Laboratory Method Blank (LMB)** / **Laboratory Reagent Blank (LRB)** - is a sample of reagent water included in the sample batch analyzed in the same way as the associated field samples. The LMB is used to determine if method analytes or other background contamination have been introduced during the preparation or analytical procedure. The LMB is analyzed exactly the same as the field samples.

Laboratory Trip Blank (LTB) / Field Reagent Blank (FRB) - is a sample of laboratory reagent water placed in a sample container in the laboratory and treated as a field sample, including storage, preservation, and all analytical procedures. The FRB/LTB container follows the collection bottles to and from the collection site, but the FRB/LTB is not opened at any time during the trip. The FRB/LTB is primarily a travel blank used to verify that the samples were not contaminated during shipment.

Matrix Spike Duplicate Sample (MSD) / Laboratory Fortified Sample Matrix Duplicate (LFSMD) - is a sample aliquot taken from the same field sample source as the Matrix Spike Sample to which known quantities of the analytes of interest are added in the laboratory. The MSD is analyzed exactly the same as the field samples. Analysis of the MSD provides a measure of the precision of the laboratory procedures in a specific matrix. SDL, SDM, and SDH / LFSMDL, LFSMDM, and LFSMDH are the MSD or LFSMD at low, mid, and high concentration levels, respectively.

Matrix Spike Sample (MS) / Laboratory Fortified Sample Matrix (LFSM) - is a sample aliquot taken from field sample source to which known quantities of the analytes of interest are added in the laboratory. The MS is analyzed exactly the same as the field samples. The purpose is to demonstrate recovery of the analytes from a sample matrix to determine if the specific matrix contributes bias to the analytical results. MSL, MSM, and MSH / LFSML, LFSMM, and LFSMH are the MS or LFSM at low, mid, and high concentration levels, respectively.

Quality Control Standard (QCS) / Second Source Calibration Verification (SSCV) - is a solution containing known concentrations of the analytes of interest prepared from a source different from the source of the calibration standards. The solution is obtained from a second manufacturer or lot if the lot can be demonstrated by the manufacturer as prepared independently from other lots. The QCS sample is analyzed using the same procedures as field samples. The QCS is used as a check on the calibration standards used in the method on a routine basis.

Reporting Limit Check (RLC) / Initial Calibration Check Standard (ICCS) - is a procedural standard that is analyzed each day to evaluate instrument performance at or below the minimum reporting limit (MRL).

Surrogate Standard (SS) / Surrogate Analyte (SUR) - is a pure compound with properties similar to the analytes of interest, which is highly unlikely to be found in any field sample, that is added to the field samples, calibration standards, blanks and quality control standards before sample preparation. The SS is used to evaluate the efficiency of the sample preparation process.



www.EurofinsUS.com/Faton

110 S. Hill Street South Bend, IN 46617 T: 1.800.332.4345

F: 1.574.233.8207

Shaded are	a for EEA us	se only			CH	IAIN OF	CUSTODY R	RECOR	D		Page		of	$\perp$	in the
REPORT TO:				SAMPLER (Signature	)		PWS ID#	T	STATE (sample origin)	PROJECT NAME	PC	D#			
Ocen-Tic 100 NM Branes Pork L		-, MO 6415	SC	(b) (6)			DW		MO	916001.002					
BILL TO: Accompts Rece. 100 Day Basiness Park Riverside, MD 64150	Du Brancas Park Lage		COMPLIANCE				RVED	SOURCE WATER	104F				CODE	TIMI TIMI	
LAB Number COLLECTION			SAMPLING SITE			TEST NAME			CHLORINATED		OF CONTAINERS	MATRIX CODE	RNAR		
2019 101	DATE	TIME	AM P								YES	NO	#	Z A	1
1 3928 106	4-24-18	4:41	X	104F-18-01			Lead & C	0805			×			DW	SW
2 107	4-24-18	4:44	X	104F-18-02			lead + (	Lupper			X		1	- /	Su
3 108	4-24-18	4:44	X	104F-18-021	oup		Lead + G	CARCE			X		1		Su
4 V 109	4-24-18	4:50	X	104F-18-03	*		Lead + Co	pps			X		ì		Sh
6	_		++												_
		-													
7			1												
8			$\perp$												
9						17	1								
10				10	0 12.1011	Inna	in hone	L	ml.						
11				(24	) la me	TUPLE	11 TROTTS	17-	ONLY						
12					la L	757711	1 Poly	in h	Alla.						
13	+	<del> </del>	+	1 6	inota o	X JUMIL	- 29//	1 00	Globa						
		<del></del>	1				U	WIII	9/2/18						
RELINQUISHED BY: (Signatu	ure)	DATE	TIME	RECEIVED BY:(Signa	ature)	DATE	Automotive and the second		THE RIGHT TO RETURN UNU	SED PORTIONS OF NON-A	QUEOUS S.	AMPLES TO	CLIENT		
		4-30-16	AM Pi	M			AM PM	IENTS	n oncold	- Su-fficier	HU	Olu	ine	per	_
RECINQUISHED BY (Signatu	ire)	DATE	TIME	RECEIVED BY:(Signa	ature)	DATE	1	org 1	t proceed	analyst.	FE KE	33/18		1	
RELINQUISHED BY: (Signatu	ure)	DATE	AM PI		DATORY BY	DATE	AM PM								
			AM PI	(b) (6)	· ·	5/2/18	TIME CONDITION	S UPON REC	EIPT (check one)	°C Upon R	Receipt		N/A		
MATRIX CODE	S:	*		WE (TAT) - SURCHARG	ES				- Martin Charles Control						
DW-DRINKING WATER RW-REAGENT WATER		ð		15 working days) 0%		IV* = Immediate	Verbal: (3 working days)	100%							
<b>GW-GROUND WATER</b>		RV* = Rush Ve				IW* =Immediate	e Written: (3 working days) 125% d, Holiday CALL			Samples received unannounced with les					
EW-EXPOSURE WATER SW-SURFACE WATER		RW* = Rush W	Vritten: (5 wo	orking days) 75%		SP* = Weekend				than 48 hours holding time remaining may be subject to additional charges.					
PW-POOL WATER WW-WASTE WATER			24			STAT* = Less th	nan 48 hours	CALL		and additional	-marges				
* Please call, expec			II. expedii	ted service not available		2010 50405									